

DALI PD

Datasheet

Phase Dimmer Module



Phase Dimmer with
DALI control input (DT4)

DALI PD:

Art. Nr. 86458618 (RL)

Art. Nr. 86458619 (RC)

Art. Nr. 86458619-25U (RLC)

DALI PD300:

Art. Nr. 86458618-300 (RL)

Art. Nr. 86458619-300 (RC)

Art. Nr. 86458619-300U (RLC)

Art.Nr. 86458619-300U-HS (RLC HS)



DALI PD Phase Dimmer Module

Overview

- Suitable for dimming of 230V LED-retrofit-bulbs via DALI (Device Type 4 from firmware 3.0 and higher)
- different types for loads from 3W to 25W (PD) for back box installation and for 10-300W (PD300) for remote ceiling and din rail
- trailing edge phase cut dimmer for resistive and capacitive loads, leading edge phase cut dimmer for resistive and inductive loads as well available as universal dimmer
- conversion of the DALI dimlevel into a phase cut controlled voltage (trailing/leading edge)
- the minimum dim level can be set via DALI (MIN LEVEL)
- additional operating mode as switch (DT7 compliant) available with firmware 3.5 and higher
- the module represents a DALI-line client and therefore it has its own DALI-address.
- double DALI terminals - the DALI signal line is connected through.




Specification, Characteristics

| type | DALI PD | DALI PD 300W | |
|----------------|--|--|------------------------|
| article number | 86458618 (RL) 86458619 (RC) 86458619-25U (RLC) | 86458618-300 (RL) 86458619-300 (RC) 86458619-300U(RLC) | 86458619-300U-HS (RLC) |

| input: L, N | |
|-------------------------|-------------------------------|
| input type | mains |
| marking terminals | L, N |
| rated input voltage | 230Vac |
| input voltage frequency | 50Hz |
| max. input power | 25W 300W |

| input: DA, DA | |
|-------------------------------|----------------|
| input type | DALI, supply |
| marking terminals | DA, DA |
| input voltage range | 9,5V ... 22,5V |
| max. current consumption DALI | 6mA |
| number of DALI addresses | 1 |

output: L', N

| | | |
|--|--|--------------|
| output type | trailing/leading edge phase cut of mains | |
| marking terminals | L', N bzw.  | |
| output voltage | 230Vac, like input | |
| phase cut angle | 0°-180° | |
| output voltage frequency | 50Hz, like input | |
| max. output current | 0.2A Eff ac | 1.45A Eff ac |
| load range | 3-25W | 10-300W |
| max. length between device and luminaire | 50m | |

Insulation data:

| | |
|---|----------------------|
| impulse voltage category | II |
| pollution degree | 2 |
| rated insulation voltage | 250V |
| insulation DALI (DA+,DA-) / (L/N/L') | reinforced isolation |
| insulation test voltage | 3000Vac |

environmental conditions:

| | |
|--|-----------------|
| storing and transportation temperature | -20°C ... +75°C |
| operational ambient temperature | -20°C ... +60°C |
| Rel. humidity, none condensing | 15% ... 90% |

general data:

| | | | |
|-----------------------------|--|--|---|
| dimensions (l x w x h) | 59x33x15 mm | 120x30x22mm | 98x17,5x56mm |
| mounting | built-in, integration in protection class II devices | remote ceiling, integration in protection class II devices | dinrail, built-in, integration in protection class II devices |
| rated max. temperature tc | 65°C | | |
| expected life time @tc | 50.000 h | | |
| protection class | II in intended use | | |
| protection degree housing | IP40 | | |
| protection degree terminals | IP20 | | |


terminals:

| | | |
|----------------------------------|--|--|
| Connection type | spring terminal connector | screw terminal |
| wire size solid core | 0,5 ... 1,5 mm ² (AWG20 ... AWG16) | 0,5 ... 2,5 mm ² (AWG20 ... AWG14) |
| wire size fine wired | 0,5 ... 1,5 mm ² (AWG20 ... AWG16) | 0,5 ... 2,5 mm ² (AWG20 ... AWG14) |
| wire size using wire end ferrule | 0,25 ... 1 mm ² | 0,25 ... 1,5 mm ² |
| stripping length | 8,5 ... 9,5mm / 0,33 ... 0,37inch | 7 mm / 0,27 inch |
| locking torque | - | 0,5Nm |
| actuation type | Push button | screw |


standards:

| | |
|------|--|
| DALI | EN 62386-101, EN62386-102, EN62386-205 |
|------|--|


| | | |
|----------|------------------------------------|----|
| EMC | EN 61547 EN 50015 / IEC CISPR15 | |
| safety | EN 61347-2-11 EN 61347-1 | |
| markings | ENEC-11, CE | CE |

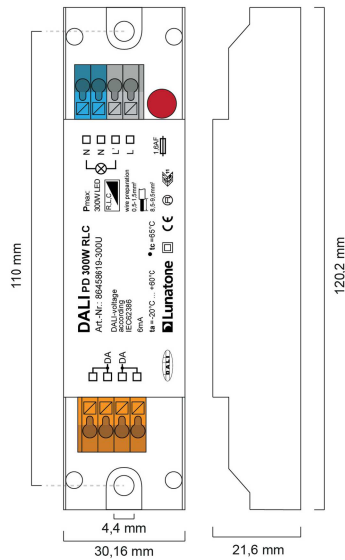


dimensions PD300 DE

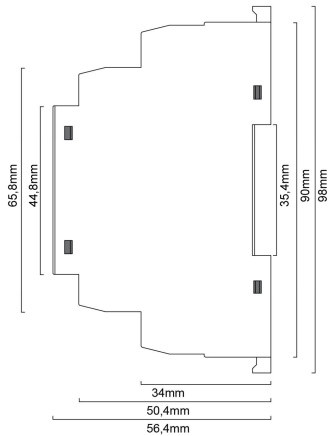

dimensions PD300 HS

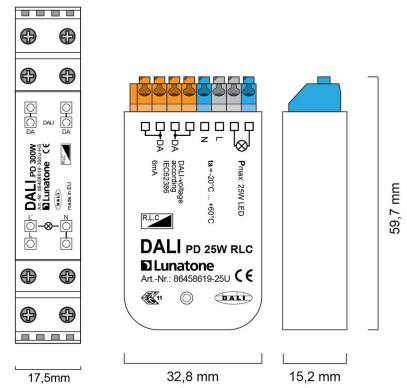


dimensions PD



connectors PD300 DE



connectors PD300 HS



connectors PD

Installation

- The DALI PD is suitable for integration in protection class II devices, ensure proper working cable relief for installation
- The DALI PD300 is an independent control gear and suitable for remote ceiling and integration in luminaires. When used as built-in in protection class II devices proper working cable relief has to be ensured
- The DALI PD300 (HS-type) is suitable for dinrail mounting, protection against shock has to be provided by an appropriate enclosure
- Wiring as fixed installation in a dry and clean environment
- Installation only by qualified person when no voltage is applied, even in case of only changing the luminaire no voltage must be applied.
- Attend regulations regarding electrical installations of national authorities
- Connect terminals L and N to mains
- Connect terminals L' and N or with the light bulb symbol to the load. Ensure that the wiring length to the load does not exceed 50m
- Do only connect luminaires that are in the rated power range of the dimmer and which are suitable with respect to the load type. Do also consider the power factor of the luminaires (especially for lamps with rated power below 25W)
- the connection to the DALI-line (DA, DA) is polarity free
- The DALI PD / DALI PD300 is supplied by the DALI-line (current consumption ~6mA)
- The DALI-line may be installed within the same cable or as single conductors within the same tube as mains supply
- The DALI-line must not be connected to the mains or other extra low voltage systems
- DALI-line wiring with standard low voltage installation material
- Wiring topology of the DALI-line: Line, Tree, Star




HINT: The DALI-signal is not classified as SELV circuit. Therefore the standards for installation in low voltage system apply.



The voltage drop on the DALI-line shall not exceed 2V.



ATTENTION: The intended use of DALI PD is dimming of LED-retrofit-luminaires, do not use with halogen lamps or magnetic transformers.

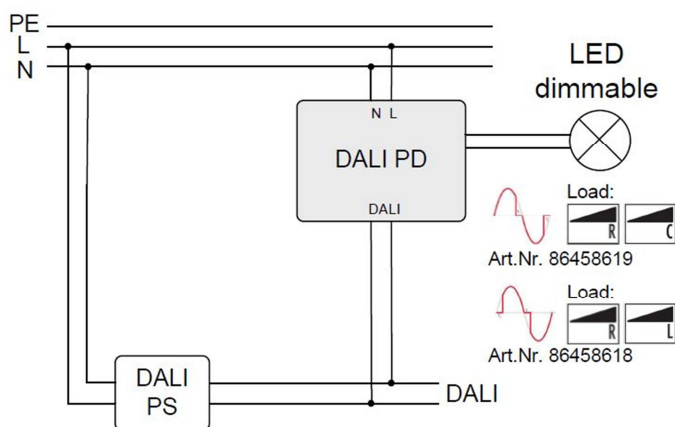

ATTENTION:
Do not apply any potential to the light bulb connector!
!
Switch off mains supply before replacing the light bulb.

typical structure

Leading edge phase cut dimmer (Art.Nr. 86458618):

| dimmer type | suitable loads | note |
|-------------|----------------|------------------------------------|
| | | Not suitable for capacitive loads! |

type of dimmers:

- Leading edge
- Trailing edge
- Universal

load:

- 3-25W: compact housing for back box installation
- 10-300W: remote ceiling, din rail

Trailing edge phase cut dimmer (Art.Nr. 86458619):

| dimmer type | suitable loads | note |
|-------------|----------------|-----------------------------------|
| | | Not suitable for inductive loads! |

When connecting multiple bulbs the same load type has to be used (inductive or capacitive).

Universal dimmer (Art.Nr 86458619-xxxU):

| dimmer type | suitable loads |
|-------------|----------------|
| | |

info universal dimmer:

suitable for resistive, inductive and capacitive loads.
After mains voltage is supplied the dimmer will recognize the load type and make a decision for leading edge phase cut operation (inductive load) or trailing edge phase cut operation (capacitive load)

ATTENTION: The intended use of DALI PD is dimming of LED-retrofit-luminaires, do not use with halogen lamps or magnetic transformers.

Commissioning

- The DALI-PD is ready to use, it is supplied by the DALI-line (current consumption ~6mA)
- With the help of the DALI-Cockpit the DALI PD can be addressed and assigned to groups and scenes

Function

The DALI PD interface converts the DALI dim level into a voltage signal. The phase cut control generates a sinusoidal voltage with leading/trailing edge phase cut (logarithmic dimming characteristic corresponding to DALI). The operation mode (trailing/leading edge) can be queried via DALI (DT4). The PHYSICAL MINLEVEL is 3%.

Up from firmware version 3.5 an additional operating mode is supported. Instead of phase dimming (DT4) the device can act as switch (DT7 capable). Hence the switching characteristic is determined by the comparison of the virtual direct arc power level (VDAP) with 4 thresholds.


The virtual dim level (VDAP) is like the dim level of DALI-ballasts and is therefore limited by MINLEVEL and MAXLEVEL and influenced by fade-time and fade-rate.

For each dim direction 2 thresholds can be defined. They are compared with the virtual dim level and as a result the output is switched on or off:

| virtual dim direction | comparison of virtual dim level and thresholds | output |
|-----------------------|--|--------|
| UP | VDAP >= UP SwitchOn Threshold | ON |
| UP | VDAP >= UP SwitchOff Threshold | OFF |
| DOWN | VDAP <= DOWN SwitchOn Threshold | ON |
| DOWN | VDAP <= DOWN SwitchOff Threshold | OFF |

If a threshold value is set to “MASK” the threshold is inactive and does not influence the relay output.

Find some examples of switching characteristics below:

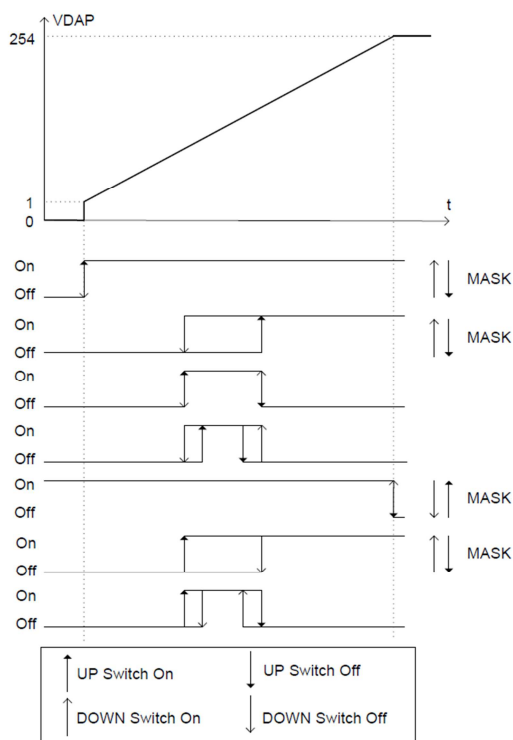


With the help of the fade time switch on and switch off delays can be realized.

Since the device is bus powered the configurable SYSTEM FAILURE LEVEL is not supported. In case of a DALI-line outage the DALI PD applies 100% at the output whereas at the output of the DALI PD300 0% are applied.

The Configuration can be done easily with the help of the DALI Cockpit:

General Settings:

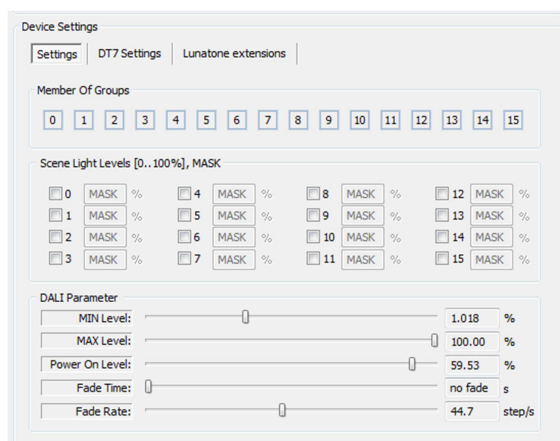


86458619-300 trailing edge dimmer (RC), 10-300W, remote ceiling, din rail type on request

86458619-25U: universal dimmer (RLC), 3-25W, back box

86458619-300U: universal dimmer (RLC), 10-300W, remote ceiling

86458619-300U-HS: universal dimmer (RLC), 10-300W, din rail

Lunatone Features:

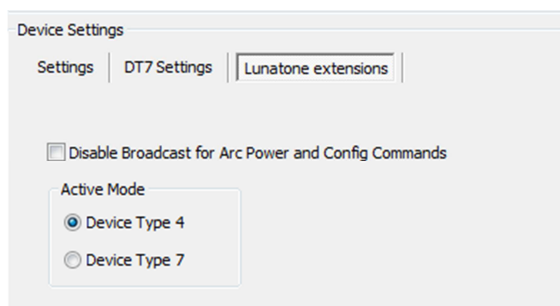

Additional Information and Equipment

DALI-Cockpit – free configuration tool from Lunatone for DALI systems

<http://lunatone.at/en/downloads/Lunatone-DALI-Cockpit.zip>


Lunatone DALI products

<http://www.lunatone.at/en/>

Lunatone datasheets and manuals

<http://lunatone.at/en/downloads/>

DT7 Settings:

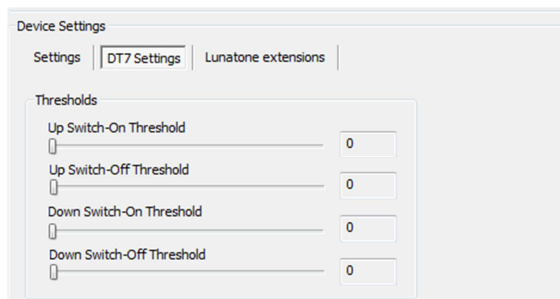

Contact

Technical Support: support@lunatone.com

Requests: sales@lunatone.com

www.lunatone.com

Purchase Order Information

article number: 864586xx – (extension)

86458618: leading edge dimmer (RL), 3-25W, back box

86458618-300: leading edge dimmer (RL), 10-300W, remote ceiling, din rail type on request

86458619: trailing edge dimmer (RC), 3-25W, back box



Disclaimer

Subject to change. Information provided without guarantee. The datasheet refers to the current delivery.

The compatibility with other devices must be tested in advance to the installation.