


ANTENNAS | HELI-3

# HELI-3

## 2400 - 2500 MHZ HIGH GAIN TUNNEL ANTENNA

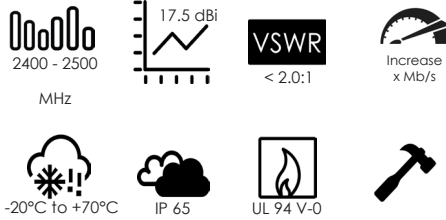

- Uni-directional
- WiFi compatible
- Ruggedised
- Future proof

### Product Overview

The tunnel antenna is the ideal antenna for 2.4-2.5 GHz wireless applications in tunnels. In tests, both the data rate and range achieved with this antenna was greater than obtained when using linearly polarized panel antennas of the same gain. The hardy construction of this antenna makes it ideal for the mining environment. A-HELI-0003 is a uni-directional antenna whilst the closely related A-HELI-0008 fires in both directions. An intrinsically safe version of this antenna is available with code A-HELI-0003-IS. This antenna gives you a low cost network infrastructure for current voice and data needs. Future proof since WiFi means low cost devices and well known access for man and machine.


### Features


- High Gain
- Rugged Construction



## Frequency bands


The HELI-3 is a wide-band antenna that works from 2400 - 2500 MHz

 Indicates the bands on which this antenna works

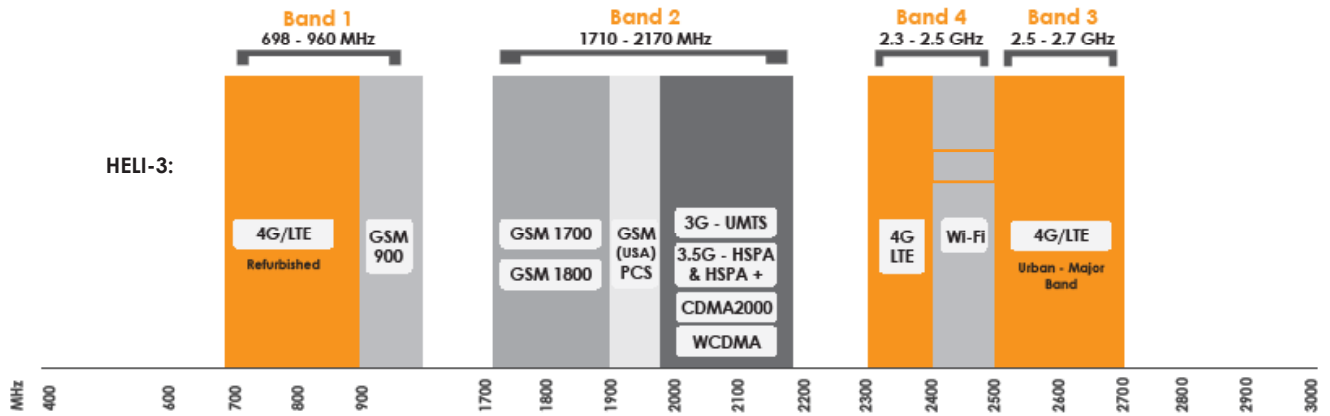

## Antenna Performance Plots

### VSWR:

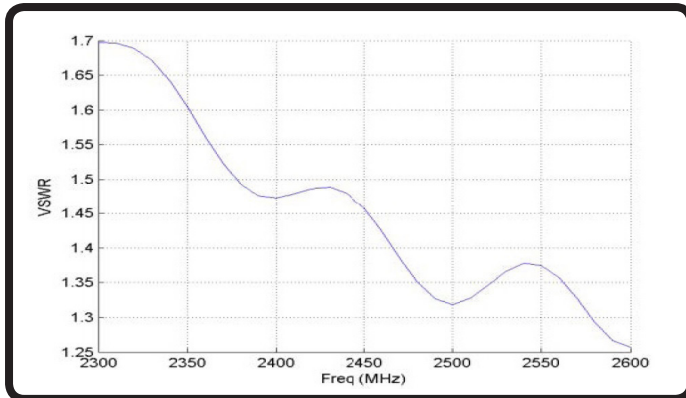


### Voltage Standing Wave Ratio (VSWR)

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 2.0:1.

The HELI-3 delivers superior performance across all bands with a VSWR of < 2.0:1 or better.

### Gain: (excluding cable loss)

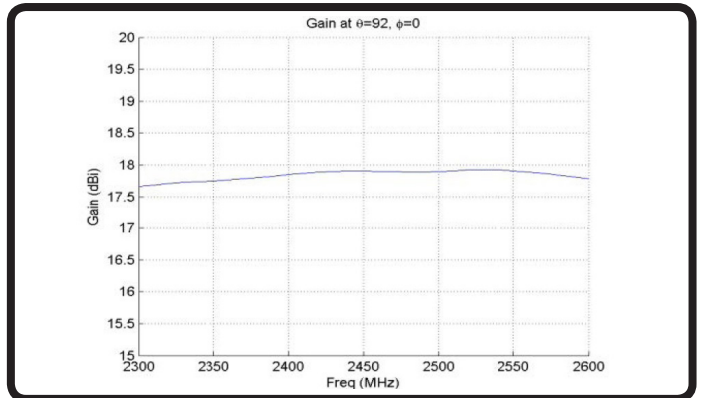

### Gain\* in dBi

17.5 dBi is the peak gain across all bands from 2400 - 2500 MHz

Gain @ 2400-2500 MHz:


17.5 dBi

\*Antenna gain measured with polarisation aligned standard antenna

## Radiation Patterns

---

### H-Plane

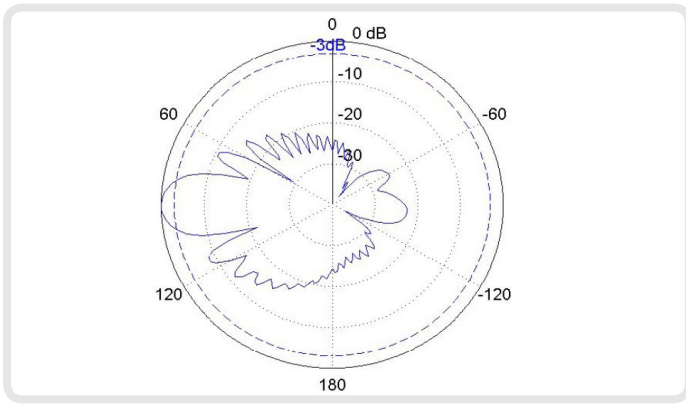

## Electrical Specifications

Frequency Bands:	2400 - 2500 MHz
Gain (Max):	17.5 dBi
VSWR:	<2.0:1
Feed Power Handling:	10 W
Input impedance:	50 Ohm (nominal)
Polarisation:	Right-hand Circular
DC Short:	Yes

## Mechanical Specifications

Product Dimensions (L x W x D):	1050 mm x 150 mm x 120 mm
Packaged Dimensions:	1060 mm x 160 mm x 160 mm
Weight:	2.35 kg
Packaged Weight:	2.6 kg
Radome Material:	PVC
Radome Colour:	429C RAL 7038

## Environmental Specifications

Temperature Range (Operating):	-20°C to +70°C
Environmental Conditions:	Outdoor/Indoor
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non condensing
Storage Temperature:	-20°C to +70°C

## Product Box Contents

Antenna:	A-HELI-0003
Mounting Bracket:	Two eyebolts for ceiling mount

*The connector is factory mounted to the antenna*



## Ordering Information

Commercial name:	HELI-3
Order Product Code:	A-HELI-0003
EAN number:	

## Additional Accessories Available

Extension Cables:	None
-------------------	------

## Certification Approvals and Standards

Flammability rating:	UL 94-V0 EN 13823
Water Ingress Protection Ratio/Standard:	IP 65 (NEMA 4X)
Impact resistance:	IK 08
Salt Spray:	MIL-STD 810F /ASTM B117
Product Safety:	Complies with UL, CE, EN, CSA and IEC standards

For more detailed information and availability in your region, visit our web site: [www.poynting.tech](http://www.poynting.tech)



## Contact Poynting

### Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park  
Landmarks Avenue,  
Samrand, 0157  
South Africa

**Phone:** +27 (0) 12 657 0050

**E-mail:** [sales@poynting.co.za](mailto:sales@poynting.co.za)

### Poynting Europe

Regus Business Center Neue Messe Riem  
Kronstadter Straße 4  
81677 München  
Germany

**Phone:** +49 89 208026538

**E-mail:** [sales-europe@poynting.tech](mailto:sales-europe@poynting.tech)

### HELI-3

©2015 Poynting Antennas (Pty) Ltd. All rights reserved.  
Product Specifications may change without prior notice

Revised: October 2015

Regulatory Compliance: RoHS 2011/65/EU Compliant | ISO 9001:2008  
Document version: TS-A-HELI-0003  
[www.poynting.tech](http://www.poynting.tech)