


mobiLink

Mobile Commissioning and Maintenance Interface for Field Devices

- Single interface for the major Process Automation protocols: HART / Foundation fieldbus / PROFIBUS PA
- Perfectly suited for handheld host devices due to battery powered Bluetooth operation
- Compatible with FDT Frame Applications
- Approved for use in hazardous areas

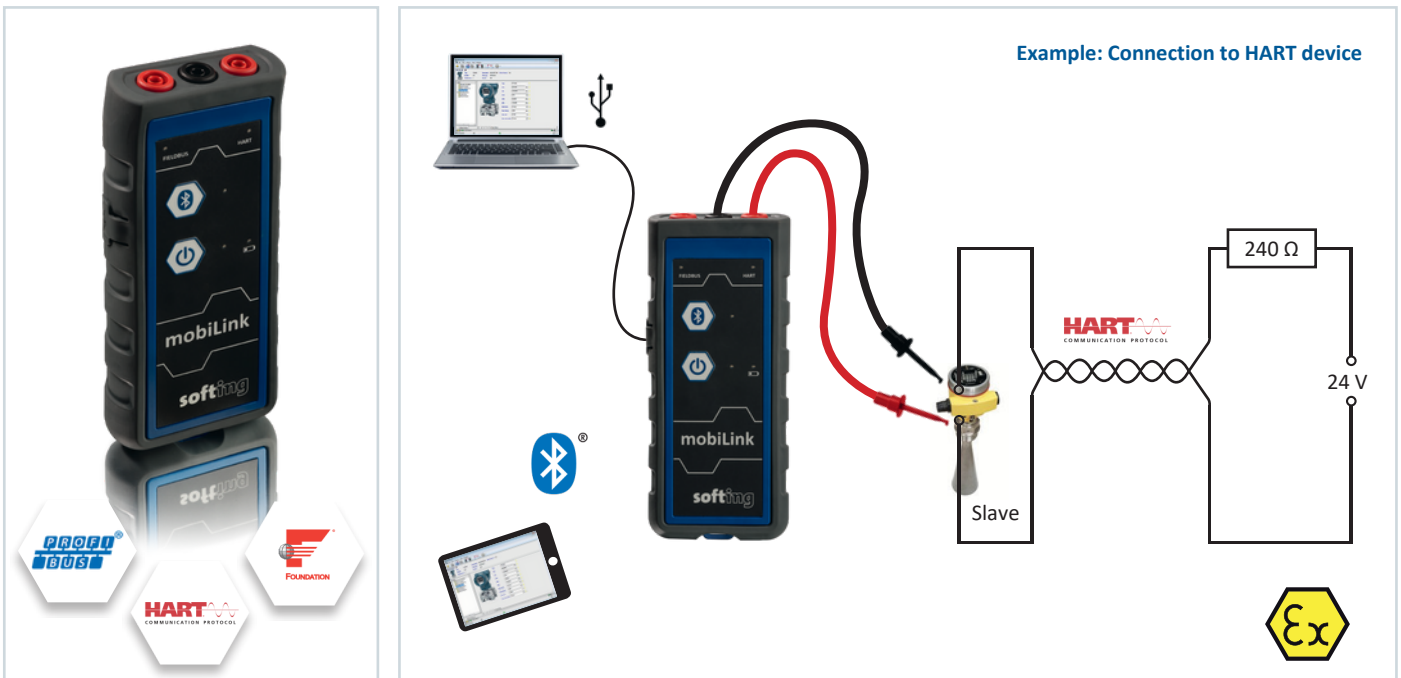

Multi protocol operation

- HART Master, Foundation fieldbus Host and PROFIBUS PA Master (available from Q3 2018) included in one device
- Temporary attachment to fieldbus segments or HART loops for individual interaction with field devices
- Fully compliant protocol implementations allow for interference-free access to running plants

Host communication via Bluetooth or USB

- Built-in batteries and Bluetooth communication enable use of handheld host devices like smart phones and tablets
- USB interface for bench host operation

Support of FDT Frame Applications and major Engineering Tools

- PACTware FDT Frame Application and HART Communication DTM included
- Communication DTM for Foundation fieldbus and PROFIBUS PA (optional)
- Foundation fieldbus configuration tool (optional)
- Application Program Interface for integration into Engineering Systems

Suitable for use in hazardous areas

- EX approval for Zone 1
- Suitable for connection to intrinsically safe circuits
- Suited for harsh environment

Technical Data

User Interface	Controls Status LEDs	Power on/off button, Bluetooth pairing button (Pairing /Bluetooth active), Low battery, Power on	FIELDBUS (Fieldbus mode), HART (HART mode), Bluetooth
Interfaces and Connectors	USB	Speed: USB 2.0 Full Speed Connector: USB Type C Electrical: Non intrinsically safe. Do not use inside hazardous areas. 5 V, 100 mA. Um = 253 V	BT mode: BT
	Bluetooth	Classic, 2.4 - 2.478 GHz Output Power: +8 dBm (maximum)	
	Fieldbus	Connection: 4 mm banana type jacks (red/black), polarity has to be observed Physical Layer: according to IEC 61158-2, Type 1: 31.25 Kbit/s, voltage mode Nominal input current (Fieldbus): 10 mA in Bluetooth and regular USB mode 18 mA (with fieldbus voltage > 9,5V) for increased battery life time in USB mode (controlled by application) Fieldbus Terminator: No built-in fieldbus terminator	
	HART	Connection: 4 mm banana type jacks (red/black) Physical Layer: HART FSK compliant modem	
Operation in Hazardous Areas	Intrinsic Safety Parameters	EX ia IIB, Ui = 30 V or FISCO field device Isolation: 1500 VDC between USB and Fieldbus, 1500 VDC between USB and HART	
Physical Properties	Dimensions (L x W x D)	175 mm x 74 mm x 32 mm	
	Weight	330 g (incl. Batteries)	
	Power Supply	Battery: 3 * Alkaline, IEC-LR6, nominal voltage 1,5 V For use in hazardous area: Energizer E91 or Duracell Procell MN1500. With batteries of other types or manufacturers certification is void. Fieldbus interface (Medium Attachment Unit) powered by fieldbus.	
	Operating Temperature	-20°C .. +50°C	
	Storage	Store batteries in a dry place at normal room temperature.	
	Relative Humidity	< 95% rH non condensing	
	Protection Class	IP 54 (if USB port covered with cap)	

Scope of Delivery

Hardware	mobiLink, USB cable, fieldbus cable set with clips, 3 * Alkaline IEC-LRC6, USB memory stick
Software	PACTware, HART Communication DTM, USB driver on USB memory stick Foundation fieldbus Communication DTM (optional license required) Foundation fieldbus Configuration Tool ComConf (optional license required)
Documentation	On USB memory stick

Order Numbers

DBA-KM-020410	mobiLink , including accessories
LRA-KK-021971	License FF CommDTM
LRA-KK-020721	License FF Configuration Tool ComConf

Your local Softing contact:



	via della Metallurgia 11, Basson 37139 VR Italia
	+39 045 820 4747
	www.marcomweb.it
	info@marcomweb.it

<http://industrial.softing.com>

optimize!
softing