

# HF2211

## Serial Server Device User Manual

V 1.2



### Overview of Characteristic

- ✧ MIPS MCU with 4MB Flash and 8MB SRAM. Run on eCos
- ✧ Support TCP/IP/Telnet /Modbus TCP Protocol
- ✧ Support RS232/RS422/RS485 to Ethernet/Wi-Fi Conversion, Serial Speed Upto 230400 bps
- ✧ Support STA/AP/AP+STA Mode
- ✧ Support Router or Bridge Network Working Mode.
- ✧ Support 10/100M Ethernet Auto-Negotiation
- ✧ Support Easy Configuration Through a Web Interface or PC IOTService Tool
- ✧ Support Security Protocol Such As TLS/AES/DES3
- ✧ Support Web OTA Wirelss Upgrade
- ✧ Wide DC Input 5~36VDC
- ✧ Size: 95 x 65 x 25 mm (L x W x H)
- ✧ FCC/CE/RoHS Certificated

## TABLE OF CONTENTS TABLE OF CONTENTS

<b>TABLE OF CONTENTS TABLE OF CONTENTS .....</b>	<b>2</b>
<b>LIST OF FIGURES.....</b>	<b>3</b>
<b>LIST OF TABLES .....</b>	<b>4</b>
<b>HISTORY.....</b>	<b>4</b>
<b>1. PRODUCT OVERVIEW.....</b>	<b>5</b>
<b>1.1. General Description.....</b>	<b>5</b>
<b>1.2. Device Parameters.....</b>	<b>5</b>
<b>1.3. Key Application.....</b>	<b>6</b>
<b>2. HARDWARE INTRODUCTION.....</b>	<b>8</b>
<b>2.1. Pins Definition.....</b>	<b>9</b>
<b>2.2. RS232 Interface.....</b>	<b>11</b>
<b>2.3. RS485 Interface.....</b>	<b>11</b>
<b>2.4. RS422 Interface.....</b>	<b>11</b>
<b>2.5. RJ45 Interface.....</b>	<b>12</b>
<b>2.6. Mechanical Size.....</b>	<b>12</b>
<b>2.7. Rail Mounting.....</b>	<b>13</b>
<b>2.8. Order Information.....</b>	<b>13</b>
<b>3. NETWORK STRUCTURE.....</b>	<b>15</b>
<b>3.1. Wireless Network.....</b>	<b>15</b>
3.1.1. AP Network.....	15
3.1.2. STA Wireless Network.....	16
3.1.3. AP+STA Wireless Network.....	17
3.1.4. IOTService Software.....	19
3.1.5. Webpage Configuration.....	20
<b>3.2. Ethernet Interface Function.....</b>	<b>20</b>
3.2.1. Ethernet Port with Wi-Fi.....	21
3.2.2. Ethernet Interface Function(Router).....	22
3.2.3. Ethernet Port Function(Bridge).....	23
<b>4. FUNCTION DESCRIPTION.....</b>	<b>25</b>
<b>APPENDIX A:REFERENCES.....</b>	<b>26</b>
<b>A.1. Test Tools.....</b>	<b>26</b>
1.1 <a href="http://www.hi-flying.com/index.php?route=download/category&amp;path=1_4">http://www.hi-flying.com/index.php?route=download/category&amp;path=1_4</a> .....	26
<b>A.2. Quick Start Manual.....</b>	<b>26</b>
<b>APPENDIX B: CONTACT INFORMATION.....</b>	<b>27</b>

## LIST OF FIGURES

Figure 1. HF2211 Appearance .....	8
Figure 2. HF2211 Interface.....	9
Figure 3. HF2211 Side View.....	10
Figure 4. RS232 Pin Defination(Male/Needle Type).....	11
Figure 5. HF2211 RS422 Connection.....	12
Figure 6. RJ45 Pin Defination.....	12
Figure 7. HF2211 Mechanical Dimension.....	13
Figure 8. HF2211 Rail .....	13
Figure 9. HF2211 Product Order Information .....	14
Figure 11. HF2211 Function Structure .....	15
Figure 12. General AP Network.....	16
Figure 13. STA Application.....	17
Figure 14. AP+STA Wireless Network.....	18
Figure 16. Configure Wi-Fi Parameter.....	19
Figure 17. STA Scan Parameter.....	19
Figure 18. Configure the Wi-Fi Parameter.....	20
Figure 19. STA Scan .....	20
Figure 20. Ethernet Interface Function .....	21
Figure 21. Ethernet Interface Function(Router) .....	22
Figure 22. Ethernet Port Function(Bridge).....	23

## LIST OF TABLES

Table 1. HF2211 Technical Specifications .....	5
Table 2. HF2211 Interface Definition .....	10
Table 3. RS232 Interface.....	11
Table 4. RJ45 Interface .....	12

## HISTORY

<b>Ed. V1.0</b>	08-03-2017	First Version
<b>Ed. V1.1</b>	06-07-2017	Update to 1.09j version. IOTService Update to 2.07e.
<b>Ed. V1.2</b>	02-15-2019	Correct wrong description.

# 1. PRODUCT OVERVIEW

## 1.1. General Description

The HF2211 provides RS232/RS485/RS422 interface to Ethernet/Wi-Fi connectivity to web enable any device. The HF2211 integrate TCP/IP controller, memory, 10/100M Ethernet transceiver, high-speed serial port and integrates a fully developed TCP/IP network stack and ECos OS. The HF2211 also includes an embedded web server used to remotely configure, monitor, or troubleshoot the attached device.

The HF2211 using highly integrated hardware and software platform. It has been optimized for all kinds of applications in the industrial control, smart grid, personal medical application and remote control that have lower data rates, and transmit or receive data on an infrequent basis.

The HF2211 integrates all serial to Ethernet functionality with 95 x 65 x 25mm size.

## 1.2. Device Parameters

Table 1. HF2211 Technical Specifications

Item	Parameters
<b>System Information</b>	
Processor/Frequency	MIPS/320MHz
Flash/SDRAM	4MB/8MB
Operating System	eCos
<b>Ethernet Port</b>	
Port Number	1 RJ45 1 WAN/LAN switchable
Interface Standard	10/100 Base-T Auto-Negotiation
Protection	8KV Isolation
Transformer	Integrated
Network Protocol	IP, TCP, UDP, DHCP, DNS, HTTP Server/Client, ARP, BOOTP, AutoIP, ICMP, Web socket, Telnet, uPNP, NTP, Modbus TCP
Security Protocol	TLS v1.2 AES 128Bit DES3
<b>Wi-Fi Interface</b>	
Standard	802.11 b/g/n
Frequency	2.412GHz-2.484GHz
Network Mode	STA/AP/STA+AP
Security	WEP/WPAPSK/WPA2PSK
Encryption	WEP64/WEP128/TKIP/ AES
Tx Power	802.11b: +20dBm (Max.) 802.11g: +18dBm (Max.) 802.11n: +15dBm (Max.)

Rx Sensitive	802.11b: -89dBm 802.11g: -81dBm 802.11n: -71dBm
Antenna	3dBi Stick Antenna
<b>Serial Port</b>	
Port Number	1 RS232/RS485/RS422
Interface Standard	RS232: DB9 RS485/RS422: 5.08mm connector Support one channel of RS232/RS422/RS485.
Data Bits	8
Stop Bit	1,2
Check Bit	None, Even, Odd
Baud Rate	TTL: 2400 bps~230400 bps
Flow Control	No Flow Control Hardware RTS/CTS、DSR/DTR Software Xon/ Xoff flow control
<b>Software</b>	
Web Pages	Http Web Configuration Customization of HTTP Web Pages
Configuration	Web CLI XML import Telnet IOTService PC Software
Firmware Upgrade	Web
<b>Basic Parameter</b>	
Size	95 x 65 x 25 mm
Operating Temp.	-25 ~ 85°C
Storage Temp.	-45 ~ 105°C, 5 ~ 95% RH (no condensation)
Input Voltage	5~36VDC
Working Current	~200mA
Power	<700mW
<b>Other Information</b>	
Certificate	CE, FCC, RoHS

### 1.3. Key Application

The HF2211 device connects serial device to Ethernet networks using the TCP/IP protocol:

- Remote equipment monitoring
- Asset tracking and telemetry
- Security Application
- Industrial sensors and controls
- Medical devices
- ATM machines
- Data collection devices
- Universal Power Supply (UPS) management units
- Telecommunications equipment
- Data display devices

- Handheld instruments
- Modems
- Time/attendance clocks and terminals

## 2. HARDWARE INTRODUCTION

The HF2211 unit is a complete solution for serial port device connecting to network. This powerful device supports a 10/100BASE-T Ethernet connection, a reliable and proven operating system stored in flash memory, an embedded web server, a full TCP/IP protocol stack, and standards-based (AES) encryption.

Through Ethernet cable connect router with HF2211 serial server for data transfer, which makes the data transformation very simple. HF2211 meet EMC Class B security level, It can pass every countries relevant certification test



Figure 1. HF2211 Appearance



## 2.1. Pins Definition

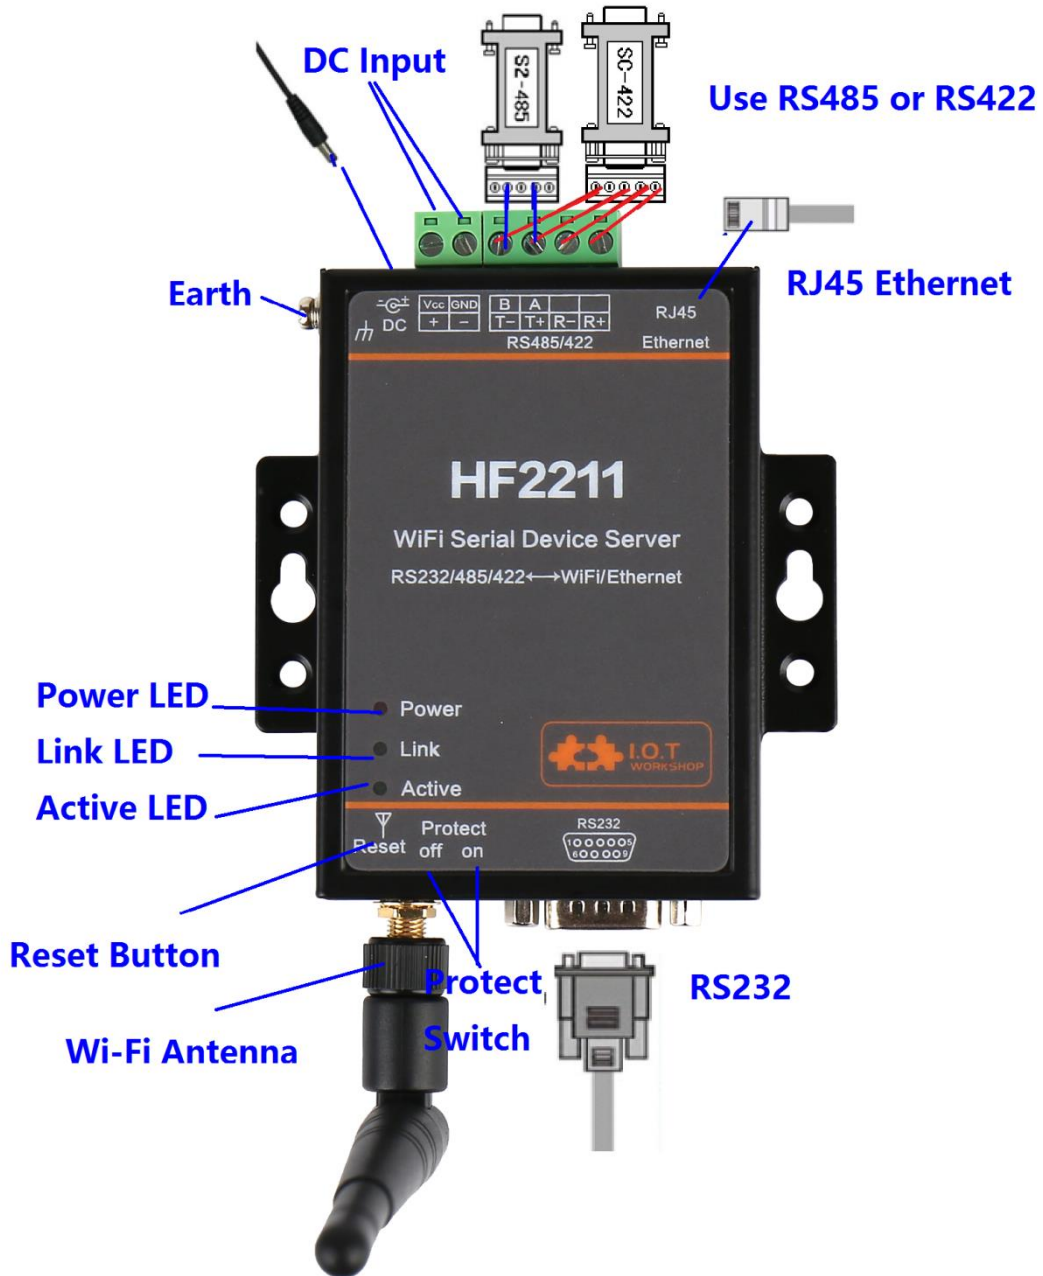


Figure 2. HF2211 Interface

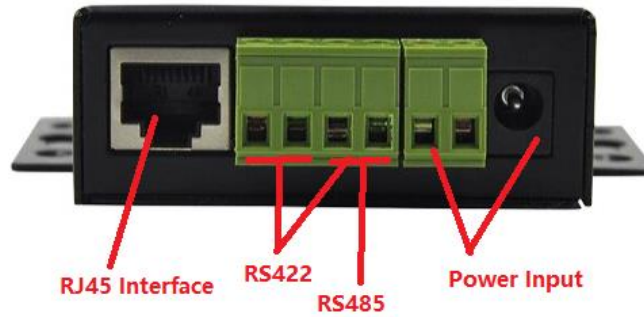


Figure 3. HF2211 Side View

Table 2. HF2211 Interface Definition

Function	Name	Description
External Interface	RJ45 Ethernet	10/100M Ethernet Default is WAN function in AP mode (Can be configured to LAN Function), connect to router LAN port for network access. In STA mode, it works in LAN function.
	SMA	Antenna SMA Interface
	RS232	RS232 Communication
	RS485/RS422	RS485/RS422 Communicaton
	Earth	Protect Earth
	DC Input	DC Power 5~36V
LED Indicator	Power	Internal Power Supply Indicator On: Power is OK Off: Power is NG
	Link	Network Connection Indicator On: Include the following condition. <ul style="list-style-type: none"> <li>● Ethernt 2 connection OK</li> <li>● Wi-Fi STA connect to AP</li> <li>● Wi-Fi AP being connected by other STA device</li> </ul> Off: No network connection
	Active	Data transfer Indicator On: Data is transferring. Off: No data transfer
Button	Reset	Restore to factory setting Long press this button for 4 seconds and loose it to restore parameters to factory setting.
Switch	Protect	Device parameter protect On: Enable protect, working parameter can not be modified. Off: Disable protect.

## 2.2. RS232 Interface

Device serial port is male(needle), RS232 voltage level(can connect to PC directly), Pin Order is consistent with PC COM port. Use cross Cable connected with PC(2-3 cross, 7-8 cross, 5-5 direct, 7-8 no connection), see the following table for pin definition.



Figure 4. RS232 Pin Definition(Male/Needle Type)

Table 3. RS232 Interface

Pin Number	Name	Description
2	RXD	Receive Data
3	TXD	Send Data
5	GND	GND
7	RTS	Request to Send
8	CTS	Clear to Send

## 2.3. RS485 Interface

RS485 use two wire links, A(DATA+), B(DATA-). Connect A(+) to A(+), B(-) to B(-) for communication.

The RS485 interface support maximum 32 485 device, special hardware version can support max 255 device. The cable maximum length is 1200 meters. Need to add 120Ohm terminal resistor for over 300 meters.

## 2.4. RS422 Interface

RS422 interface use T+/T-/R+/R-, cross connect to device as the following picture.

Name	Description
TX+	Transfer Data+
TX-	Transfer Data-
RX+	Receive Data+
RX-	Receive Data-

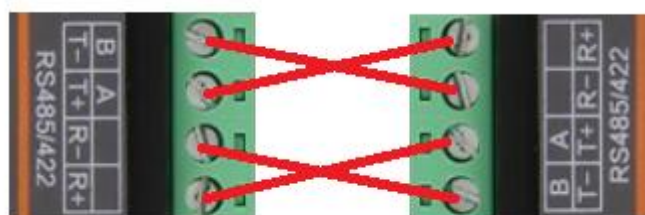


Figure 5. HF2211 RS422 Connection

## 2.5. RJ45 Interface

Ethernet port is 10M/100M adaptive, support AUTO MDI/MDIX which means it support direct connecting to PC with Ethernet cable.




Figure 6. RJ45 Pin Definition

Table 4. RJ45 Interface

Pin Number	Name	Description
1	TX+	Transfer Data+
2	TX-	Transfer Data-
3	RX+	Receive Data+
4	PHY-VCC	Transformer Tap Voltage
5	PHY-VCC	Transformer Tap Voltage
6	RX-	Receive Data-
7	N.C.	None Connect
8	N.C.	None Connect

## 2.6. Mechanical Size

The dimensions of HF2211 are defined as following picture (mm):



Figure 7. HF2211 Mechanical Dimension

## 2.7. Rail Mounting

We support to provide rail for mounting as the following picture.

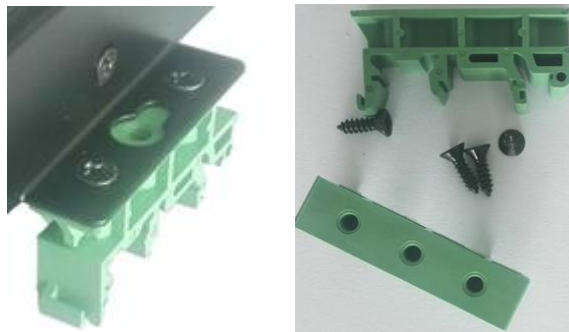


Figure 8. HF2211 Rail

## 2.8. Order Information

HF2211 is defined as following:

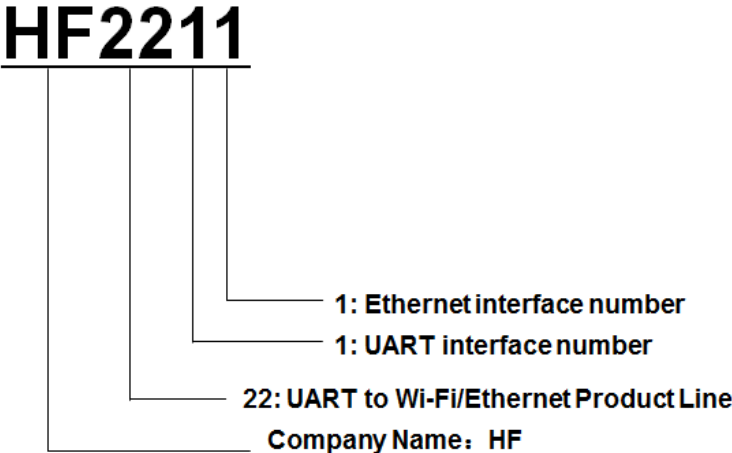


Figure 9. HF2211 Product Order Information

# 3. NETWORK STRUCTURE

## 3.1. Wireless Network

HF2211 can be set as a wireless STA and AP as well. And logically, it supports two wireless interfaces, one is used as STA and the other is AP. Other STA devices can join into the wireless network through AP interface. So the it can provide flexible networking method and network topology. Functions is as follow:

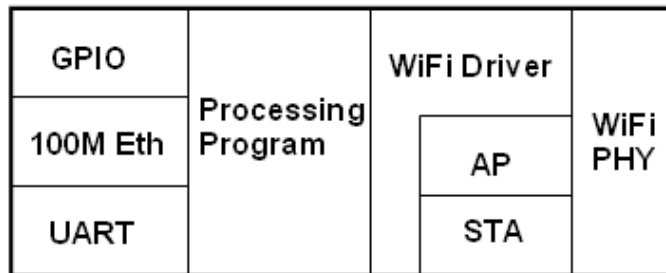


Figure 11. HF2211 Function Structure

<Introductions>

AP: Wireless access point which is the central joint. Usually, wireless router is a AP, other STA devices can connect with AP to join the network.

STA: Wireless station which is terminal of a wireless network. Such as laptop and pad etc.

### 3.1.1. AP Network

HF2211 can construct a wireless network as AP. All the STA devices will consider the AP as the centre of the wireless network. The mutual communication can be transponded by AP,shown as follow:



Figure 12. General AP Network

**3.1.2. STA Wireless Network**

Take the following picture as example. When router works in AP mode, HF2211 connects to the user’s devices by RS232/RS485 interface. In this topology, the whole wireless network can be easily stretched.



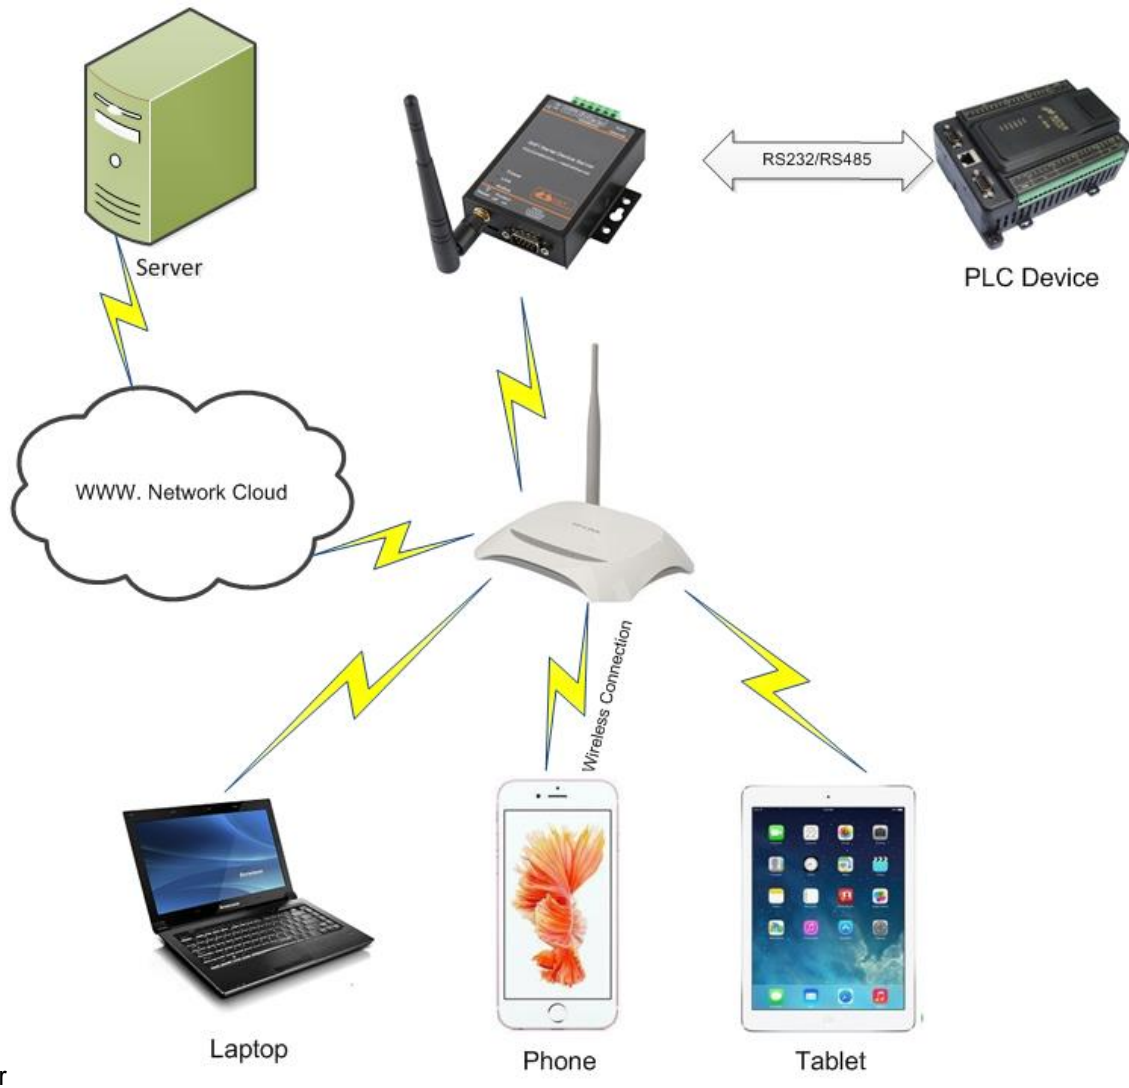


Figure 13. STA Application

### 3.1.3. AP+STA Wireless Network

HF2211 can support AP+STA method. It can support AP and STA interface at the same time. Shown as follow:



Figure 14. AP+STA Wireless Network

In this picture, HF2211 open the AP+STA function and the STA interface can be connected to the remote server by the router. Similarly, the AP interface can also be used. Phone/PAD can be connected to the AP interface and to control the serial devices or set itself.

Through AP+STA function, it is convenient to use Phone/PAD to monitor the user’ s devices and not change its original settings.

Through AP+STA function, it is convenient to configure the product.And it solves the problem that the formal product can only configure by serial port.

**Notes that:**

**When the AP+STA function is opened, the STA interface needs to connect to other router. Otherwise, STA interface will endlessly scan the router information nearby. When it is scanning, it will bring bad effects to the AP interface, like losing data etc.**

**AP and STA parts must set to the different sub-network for the product working as APSTA mode.**

### 3.1.4. IOTService Software

Open the IOTService after connect to the AP hotspot generated by HF2211 or connect to Product Ethernet port to PC, then configure the parameter.

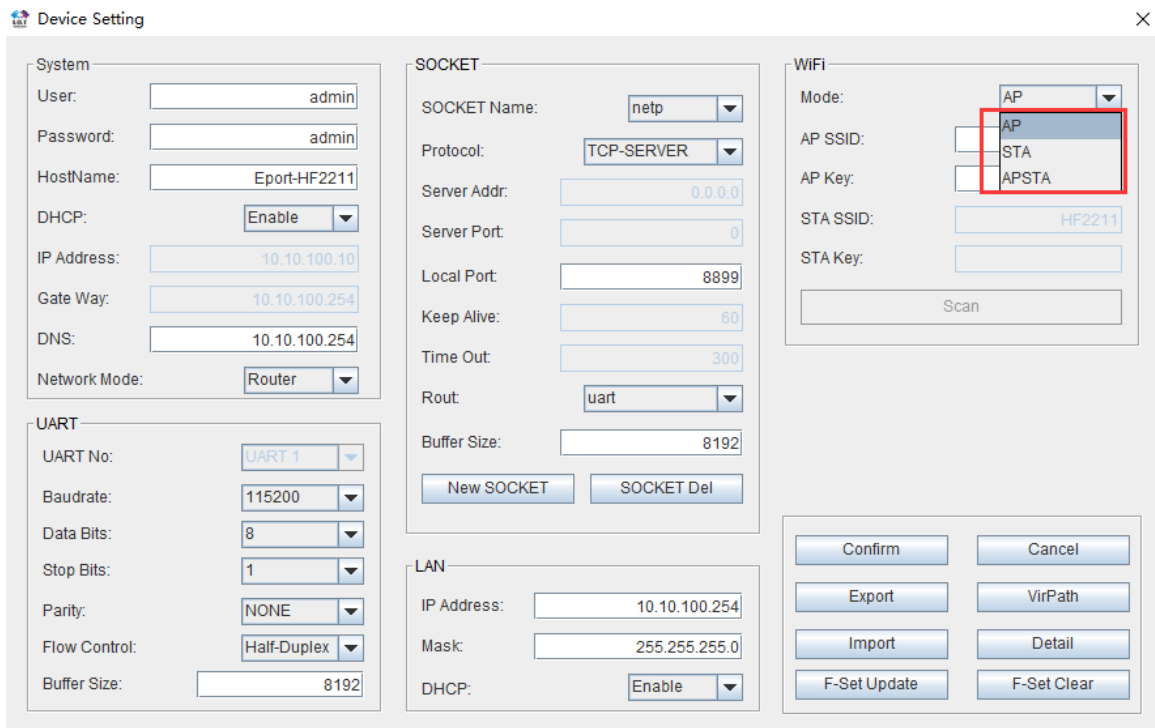


Figure 16. Configure Wi-Fi Parameter

Scan

Select	Channel	SSID	MAC Address	RSSI	Has Key
<input type="radio"/>	11	Sam401	D4:EE:07:2D:14:1E	100	Yes
<input type="radio"/>	10	ChinaNet-yRMx	38:E3:C5:A2:87:D5	100	Yes
<input type="radio"/>	11	UPGRADE-AP	20:DC:E6:48:35:9E	39	Yes
<input type="radio"/>	6	xiaoheizi	B0:95:8E:06:CB:16	29	Yes
<input type="radio"/>	11	Caoyu	78:96:82:A2:C6:A2	0	Yes
<input type="radio"/>	0	Caoyu		0	Yes

Figure 17. STA Scan Parameter

### 3.1.5. Webpage Configuration

Use PC to connect with HF2211 through its AP hotspot or Ethernet connection. Input the default IP(10.10.100.254, default username and password: admin/admin) to login the webpage to configure the parameter.

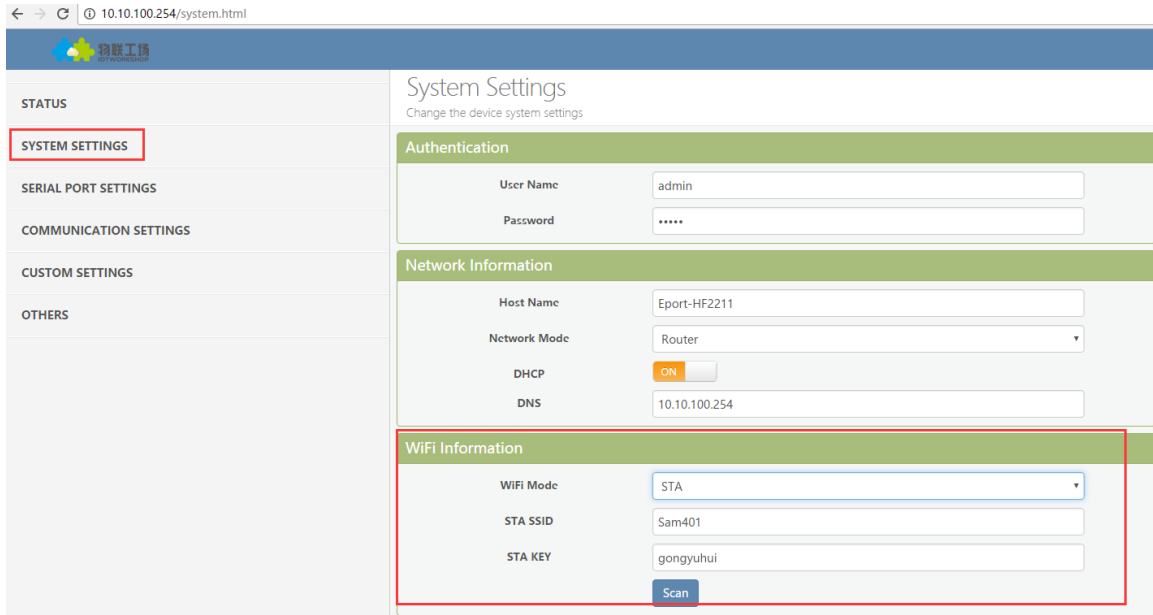


Figure 18. Configure the Wi-Fi Parameter

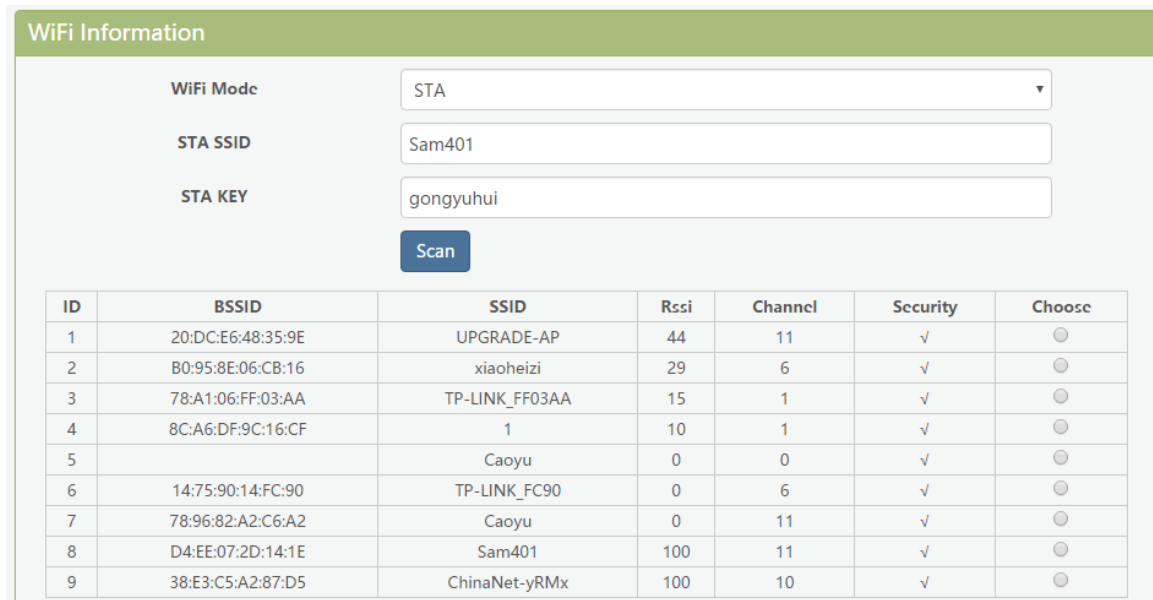


Figure 19. STA Scan

### 3.2. Ethernet Interface Function

HF2211 provides with a 100M Ethernet interface. Through the 100M Ethernet interface, user can achieve the connection among WIFI, serial port and Ethernet port.

### 3.2.1. Ethernet Port with Wi-Fi

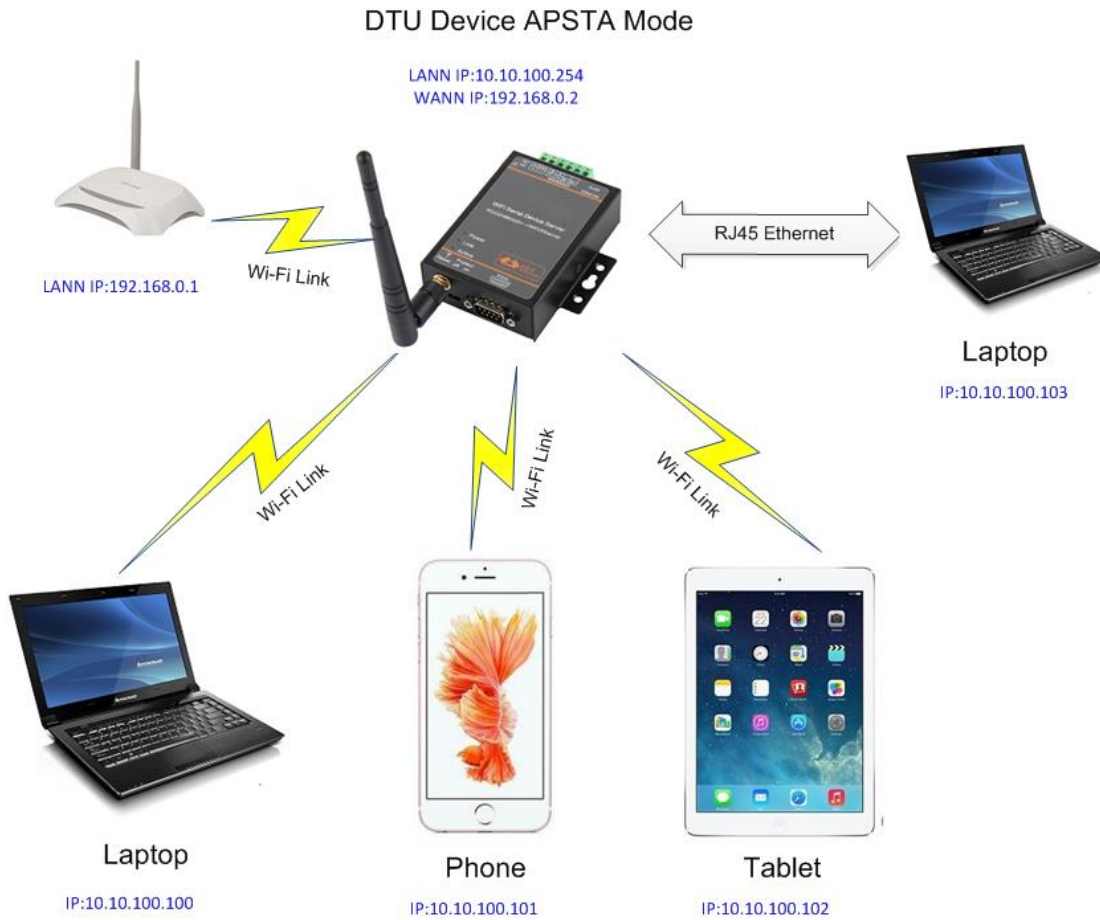


Figure 20. Ethernet Interface Function

HF2211 servers as APSTA and generate a central network. The IP addresses of all the devices and module's are in the same network segment.

Note:

If product works in AP mode, then the Ethernet is working as WAN mode, PC will use Auto-IP to set its IP when connect via Ethernet. Better to change via Wi-Fi, then the PC and other devices are all in same subnetwork.(10.10.100.xxx)

SN	DevType	MAC Address	HostName	IP	Position	VirPath	State	SW Ver
1	HF2211	F0FE6B5373...	Eport-HF2211	169.254.173.207	Local		Online	1.09j

```

C:\WINDOWS\system32\cmd.exe
Windows IP 配置

以太网适配器 以太网:


    连接特定的 DNS 后缀 . . . . . : fe80::b873-7689-f23e-5775%2
    本地链接 IPv6 地址 . . . . . :
    自动配置 IPv4 地址 . . . . . : 169.254.87.117
    子网掩码 . . . . . :
    
```


### 3.2.2. Ethernet Interface Function(Router)



Figure 21. Ethernet Interface Function(Router)

The HF2211 device Ethernet interface work in router mode. When connect to router, it will get IP address from router(as picture 192.168.1.100). The product itself generate a subnet(10.10.100.254 default). The device from the Ethernet interface is assigned with IP address by module (10.10.100.101 ).Then the device and the PC1 are in the same subnet for network communication. A connection fro PC1 to PC2, but PC2 cannot actively connect to PC1.

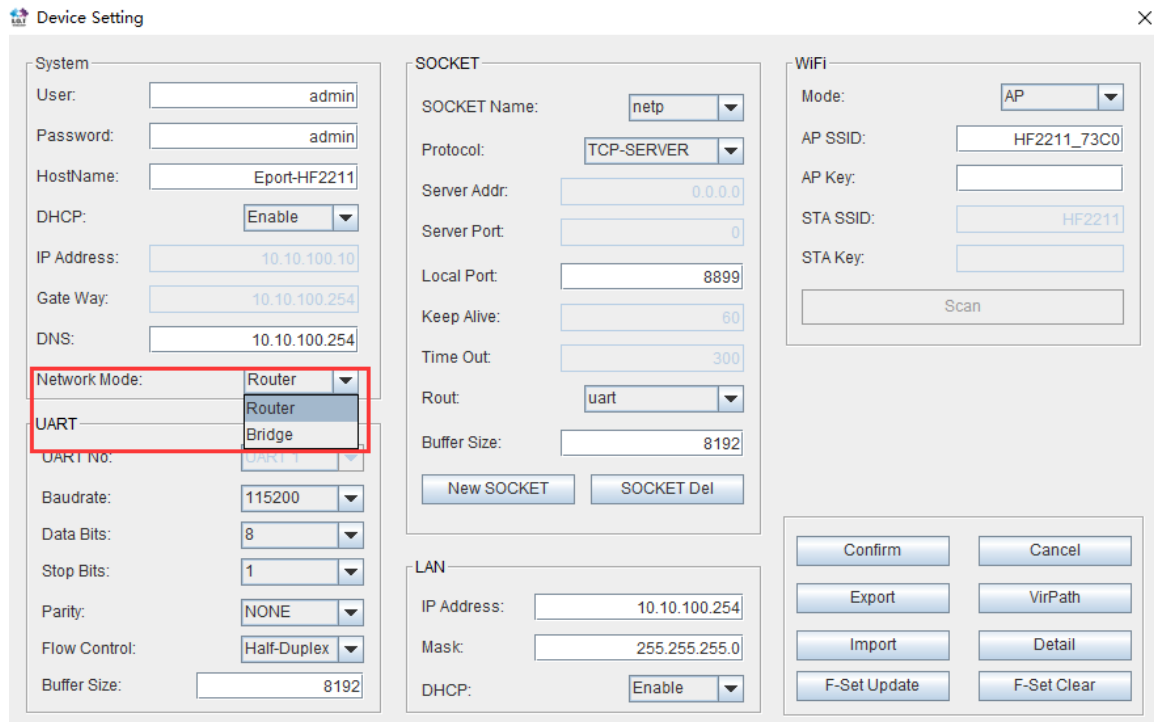

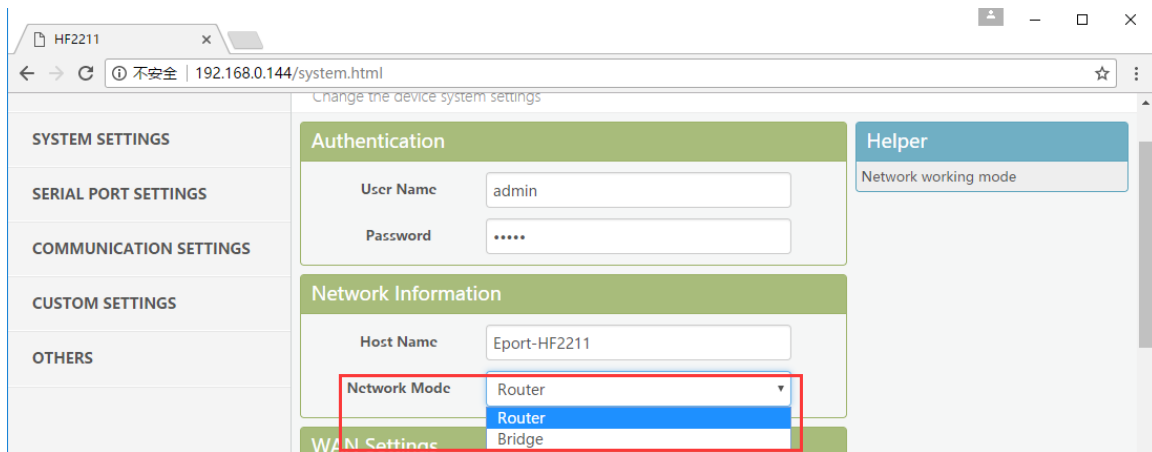

### 3.2.3. Ethernet Port Function(Bridge)



Figure 22. Ethernet Port Function(Bridge)

The HF2211 device Ethernet interface work in router mode. When connect to router, it will get IP address from router(as picture 192.168.1.101). AT the whole network, the product is like an invisible device. PC1 ad PC2 can communicated mutually without any constraint. But if product needs to connect with other devices, it needs set LAN IP address(192.168.1.10 as picture)

Notes:

Webpage, IOTService, or Cli command to set working mode, by default is router mode. **It need reboot when change its working mode.**

Device Setting

System

User: admin

Password: admin

HostName: Eport-HF2211

DHCP: Disable

IP Address: 10.10.100.10

Gate Way: 10.10.100.254

DNS: 10.10.100.254

Network Mode: Bridge

SOCKET

SOCKET Name: netp

Protocol: TCP-SERVER

Server Addr: 0.0.0.0

Server Port: 0

Local Port: 8899

Keep Alive: 60

Time Out: 300

Rout: uart

Buffer Size: 8192

New SOCKET SOCKET Del

WiFi

Mode: STA

AP SSID: HF2211\_73C0

AP Key:

STA SSID: UPGRADE-AP\_aaaa

STA Key: 12345678

Scan

UART

UART No: UART 1

Baudrate: 115200

Data Bits: 8

Stop Bits: 1

Parity: NONE

Flow Control: Half-Duplex

Buffer Size: 8192

LAN

IP Address: 192.168.1.10

Mask: 255.255.255.0

DHCP: Enable

Confirm Cancel

Export VirPath

Import Detail

F-Set Update F-Set Clear



## 4. FUNCTION DESCRIPTION

Refer to “IOT\_Device\_Series\_Software\_Funtion” document for more detailed function.

# APPENDIX A:REFERENCES

## A.1. Test Tools

IOTService Configure Software:

<http://www.hi-flying.com/download-center-1/applications-1/download-item-iotservice>

UART、Network Test software:

1.1 [http://www.hi-flying.com/index.php?route=download/category&path=1\\_4](http://www.hi-flying.com/index.php?route=download/category&path=1_4)

## A.2. Quick Start Manual

See our product application on website:

<http://www.hi-flying.com/wi-fi-iot/wi-fi-serial-server/rs232-rs485-rs422-to-wifi-serial-server>

## APPENDIX B: CONTACT INFORMATION

---

**Address:** Room 1002,Building 1,No.3000,Longdong Avenue,Pudong New Area,Shanghai,China,201203

**Web:** [www.iotworkshop.com](http://www.iotworkshop.com) or [www.hi-flying.com](http://www.hi-flying.com)

**Contact:**

Sales: [sales@iotworkshop.com](mailto:sales@iotworkshop.com)

Support: [support@iotworkshop.com](mailto:support@iotworkshop.com)

Service: [service@iotworkshop.com](mailto:service@iotworkshop.com)

Business: [business@iotworkshop.com](mailto:business@iotworkshop.com)

---

For more information about IOTworkshop modules, applications, and solutions, please visit our web site [www.iotworkshop.com](http://www.iotworkshop.com)

**<END OF DOCUMENT>**